


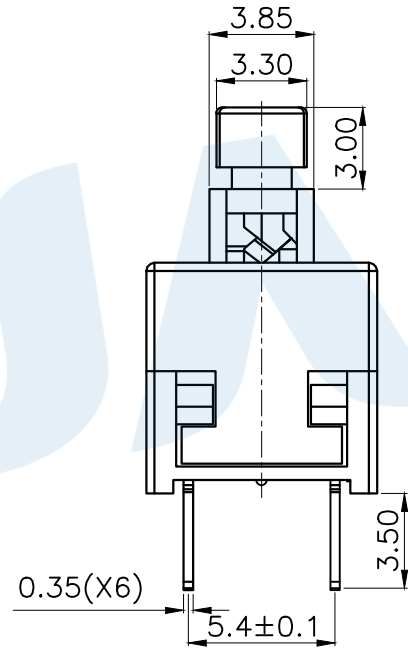
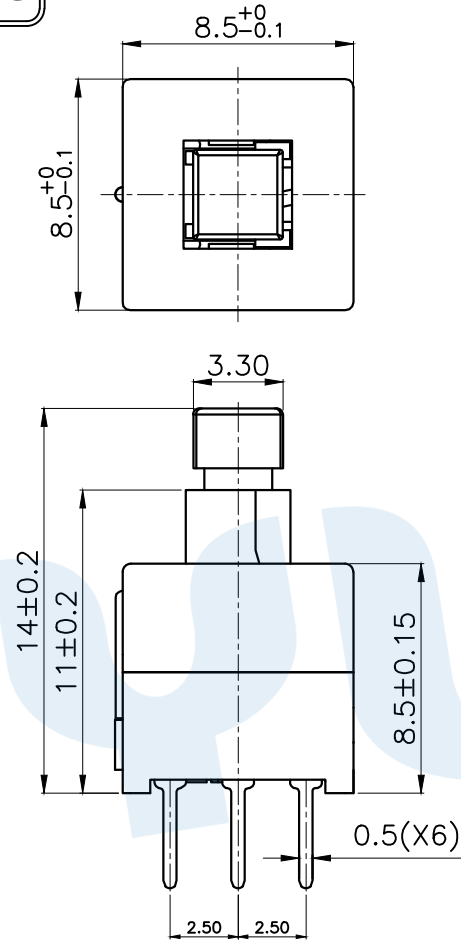




RoHS



PCB Layout(Pattern Side)

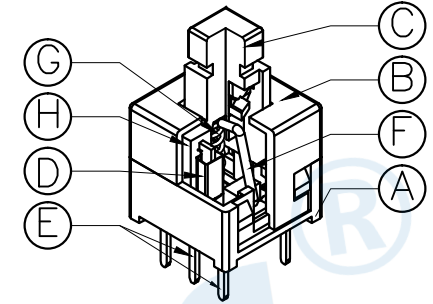

Circuit Diagram

NO.	Operating Type	Part No.	Operating force	Travel
1	Push To Lock	TK-6830-1	240±50gf	2.4±0.2
2	Push No Sound No Lock	TK-6830-2	240±50gf	2.4±0.2

NO.	Name	Number	Qty	Materil	Remarks
(H)	Injection Terminal	2		Nylon	Black
(G)	Spring	1		SUS	Natural
(F)	Crochet Needle	1		SUS	Natural
(E)	Terminal	6		Brass	Silvering
(D)	Reed	2		Phosphorus Copper	Silvering
(C)	Button	1		POM	White
(B)	Cover	1		POM	Black
(A)	Base	1		PBT	Black

YUANDI® Yuandi Electronics Co, Ltd

design	date	name	model
Review	date	BUTTON SWITCH	TK-6830-□
Approved	date		

Drawing number: Proportion 1:1 unit mm gage number A4

modify Review Approved Tolerance not specified