

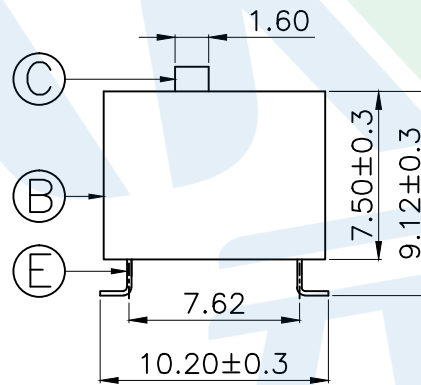
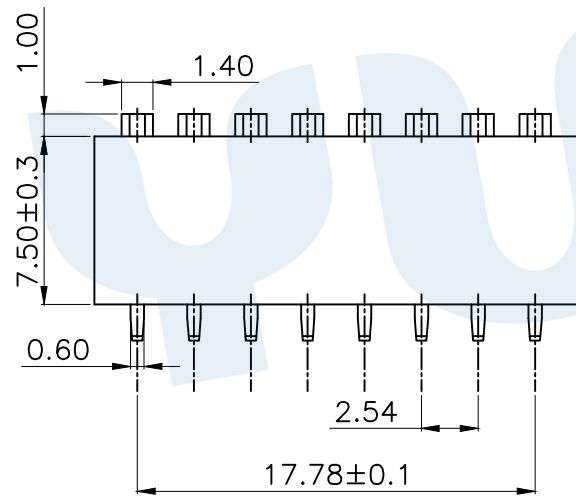
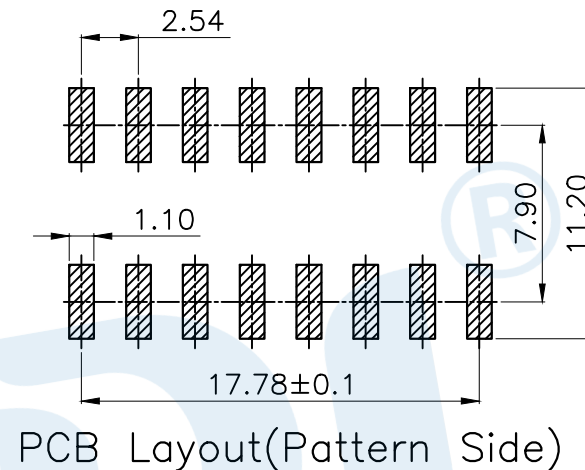



RoHS

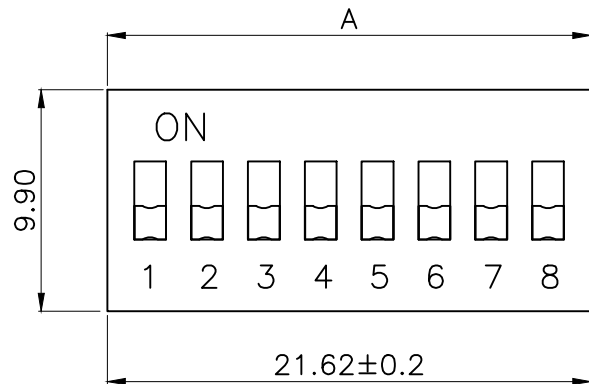

凸柄 Convex handle



短柄 Short handle

NOTE:

1. Rating: 24V 25mA DC
2. Insulation Resistance:  $\geq 100 \text{ M}\Omega$
3. Withstand voltage: AC 500V 1Minute
4. Operating Force Range: 800gf Max
5. Mechanical Life: 3,000 Cycles

Number of digits (位数)		2P	4P	6P	8P
Cover/red 盖子/红色	凸柄 Convex handle	TN-02	TN-04	TN-06	TN-08
	短柄 Short handle	TN-02D	TN-04D	TN-06D	TN-08D
Cover/blue 盖子/蓝色	凸柄 Convex handle	TN-02R	TN-04R	TN-06R	TN-08R
	短柄 Short handle	TN-02L	TN-04L	TN-06L	TN-08L
DIM. A	长度 length	6.38	11.46	16.54	21.62

Ⓔ	Terminal		16	Phosphorus bronze	Gold plating
Ⓗ	Potting glue			Epoxy resin	Black
Ⓒ	Handle		8	PA46	White
Ⓑ	Cover		1	PBT	Red/Blue
Ⓐ	Base		1	PBT	Black
NO.	Name	Number	Qty	Materil	Remarks

YUANDI® Yuandi Electronics Co, Ltd  
元迪

design	date	name	DIP SWITCH
Review	date	model	TN-08
Approved	date		

Drawing number: Proportion 1:1 unit mm gage number A4

modify Review Approved Tolerance not specified