


RoHS

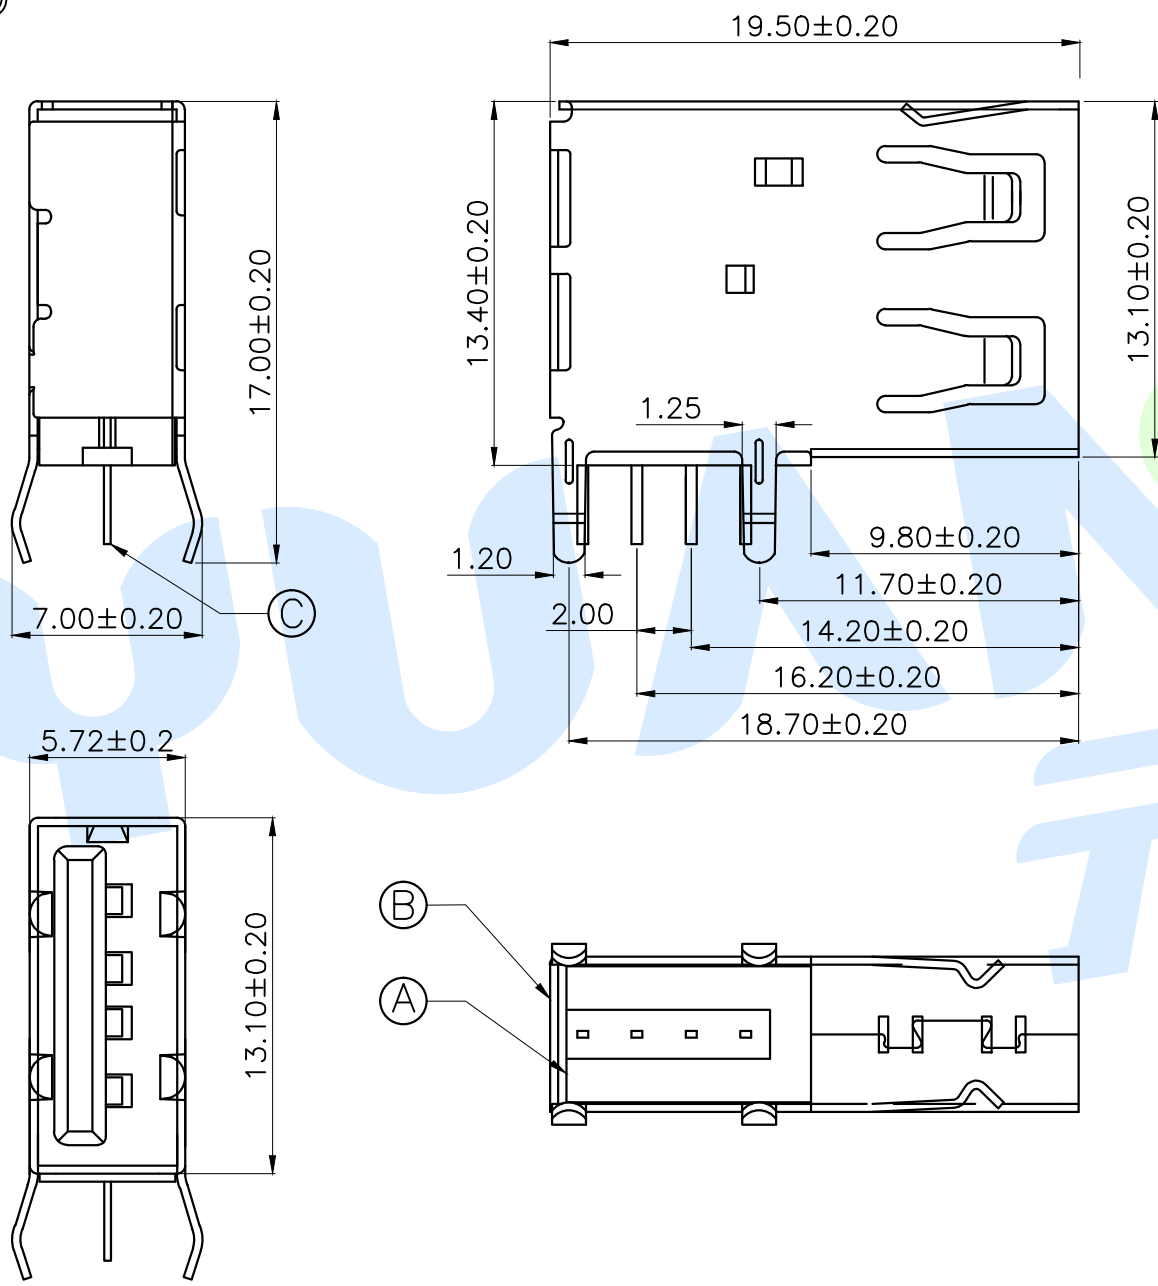

P.C.B Layout(Pattern side)

规格说明: Specifications
电气特性: Electrical

1. 额定电流: Current Rating
1.5A/contact terminal
 2. 额定电压: Voltage Rating
30V DC
 3. 接触阻抗: Contact Resistance
50 milliohms Max
 4. 耐电压: Dielectric Withstanding Voltage
AC 500V/1MINUTE.
 5. 绝缘阻抗: Insulation Resistance
1000MEGA Ohms Min
- 物理性能: Mechanical
1. 插拔力: Connector Mate and Unmate Force
Insertion force: 35N(3.57kgf) MAX
Extraction force: 10-35N(1.02-3.57kgf) Min
- 端子保持力: Terminal Retention
1.0kgf(MIN)
- 耐久性: Durability
3000cycles. EXTRACTLON FORCE:
10-35N(1.02-3.57kgf)

| Ⓒ | Terminal | | 4 | Brass | Ag Plating |
|-----|----------|--------|-----|---------|------------|
| Ⓑ | Shell | | 1 | SPCC | Ni Plating |
| Ⓐ | Base | | 1 | PBT | White |
| NO. | Name | Number | Qty | Materil | Remarks |

YUANDI® Yuandi Electronics Co, Ltd
元迪

| | | | | | | | |
|----------|--|--------|--|-----------------|--|-------------------------|--|
| design | | date | | name | | USB CONNECTOR | |
| Review | | date | | model | | USB90-10-T1-W | |
| Approved | | date | | Drawing number: | | | |
| modify | | Review | | Approved | | Tolerance not specified | |
| angle | | ±2' | | Proportion 1:1 | | | |
| 10~30 | | ±0.30 | | unit mm | | | |
| 5~10 | | ±0.20 | | gaps number | | | |
| ~ 5 | | ±0.10 | | A4 | | | |